





AVAILABLE SIZES

300x300mm
300x600mm
600x600mm
600x1200mm
400x600x20mm

BULLNOSE ROUND EDGE

400x600x20mm

BIANCO

AVAILABLE SIZES

300x300mm
300x600mm
600x600mm
600x1200mm
400x600x20mm

BULLNOSE ROUND EDGE

400x600x20mm

BIANCO
600x1200mm
SABBIA
600x1200mm

SABBIA



AVAILABLE SIZES

300x300mm
300x600mm
600x600mm
600x1200mm
400x600x20mm

BULLNOSE ROUND EDGE

400x600x20mm

BIANCO



BIANCO
600x600mm



BIANCO
600x1200mm



Paver
400x600mm
20mm Thickness



Bullnose-Round Edge
400x600mm
20mm Thickness



BIANCO
400x600mm



AVAILABLE SIZES

300x300mm
300x600mm
600x600mm
600x1200mm
400x600x20mm

BULLNOSE ROUND EDGE

400x600x20mm

SABBIA



SABBIA
600x600mm




BIANCO
600x1200mm
SABBIA
600x1200mm



Paver
400x600mm
20mm Thickness




Bullnose-Round Edge
400x600mm
20mm Thickness

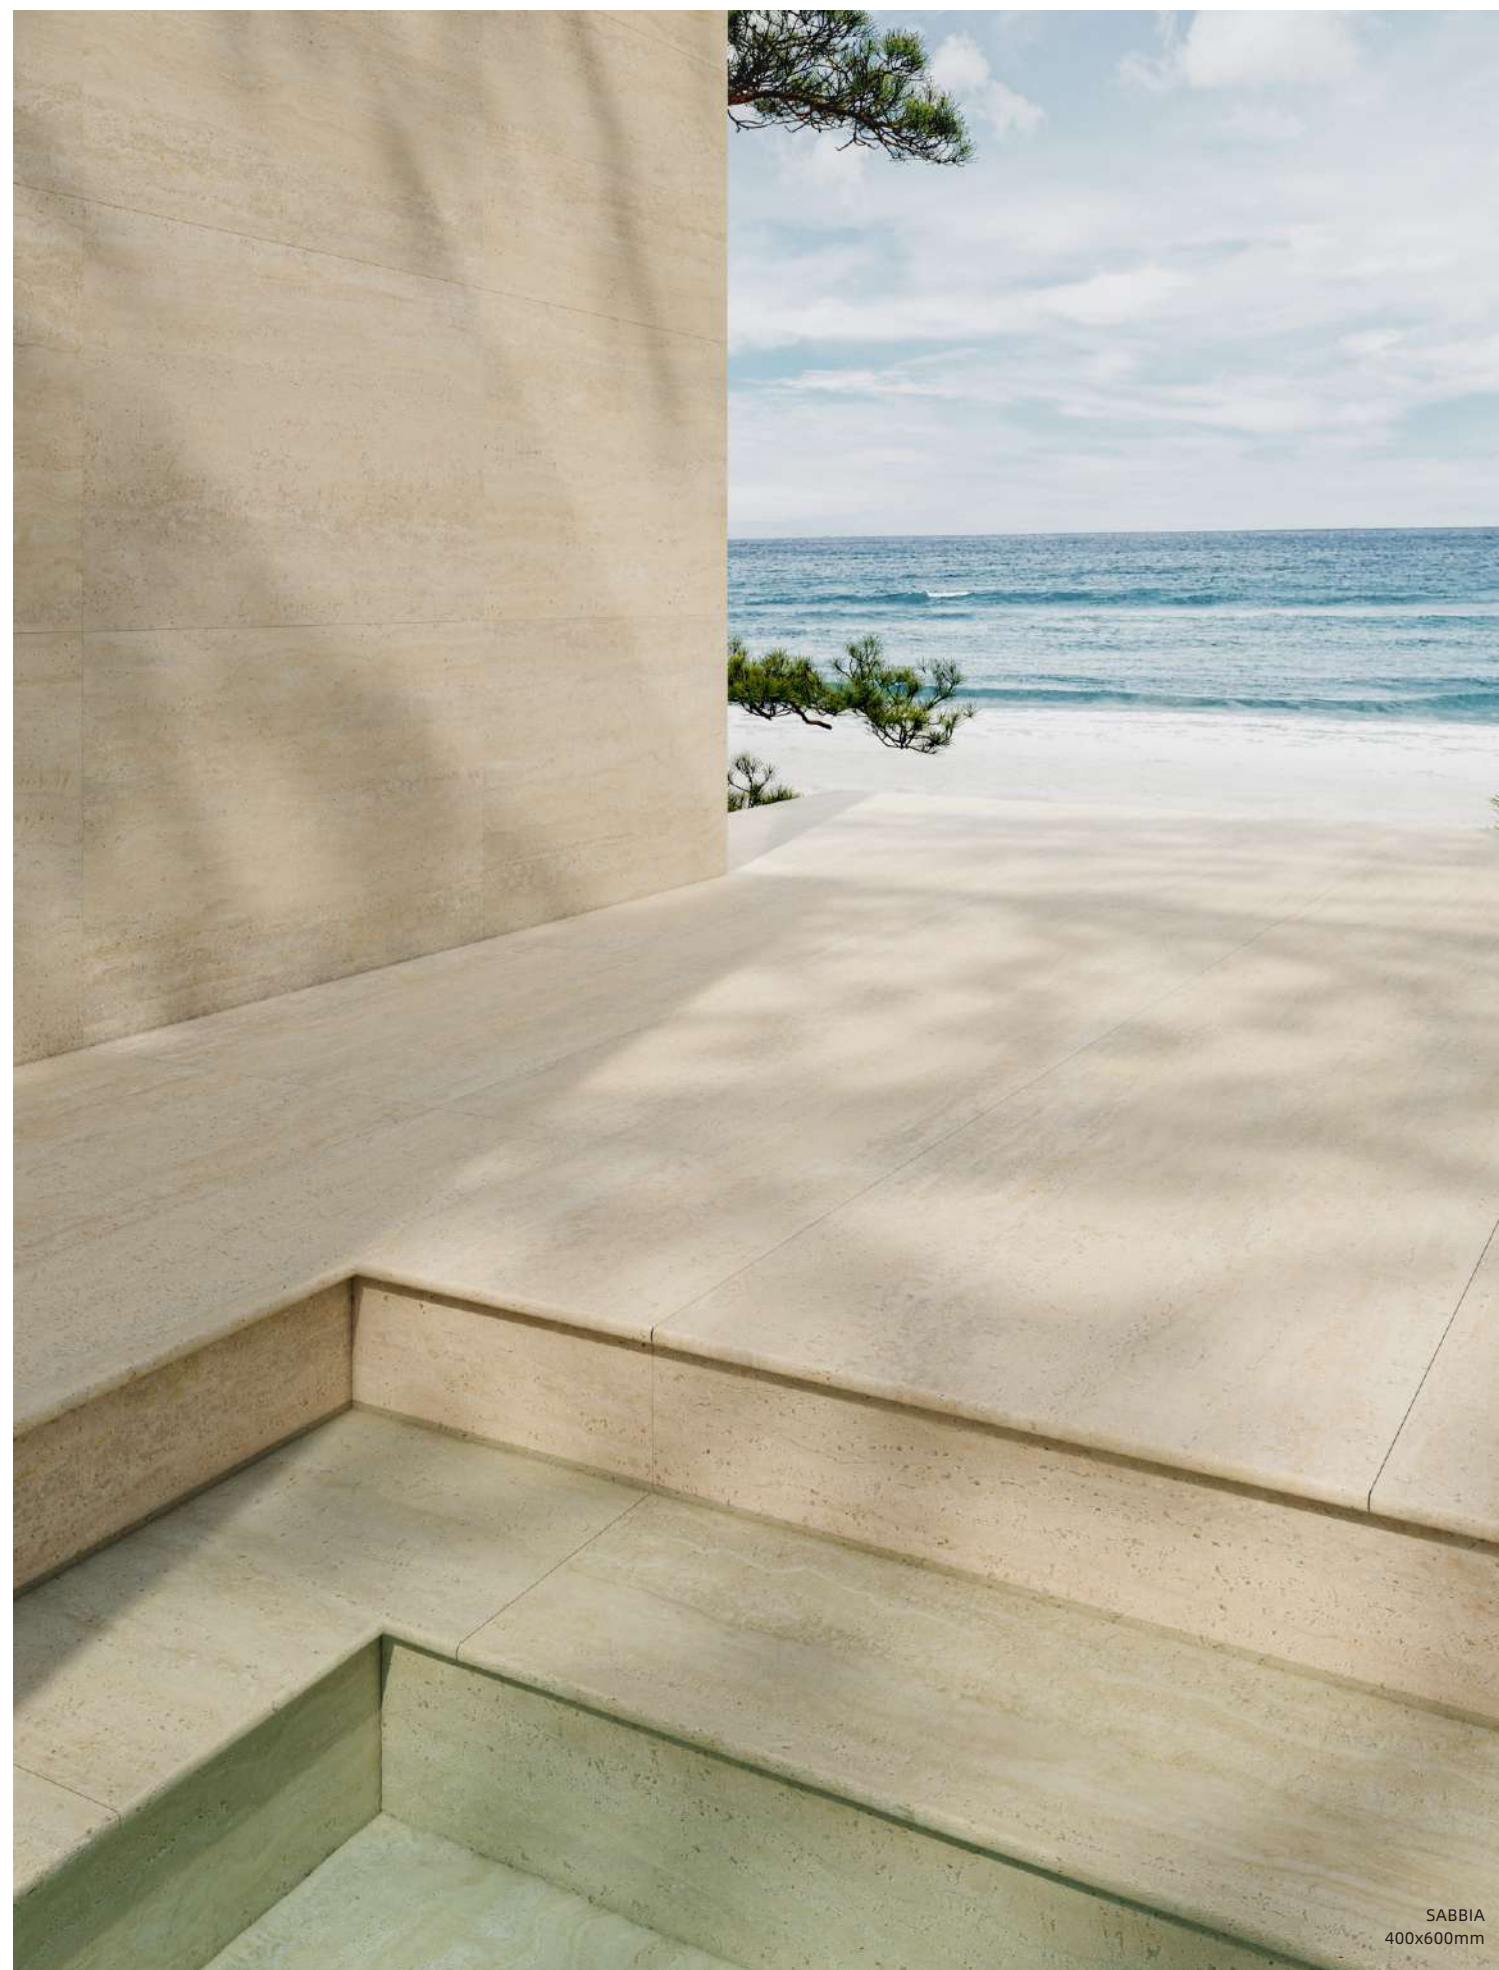


SABBIA
400x600mm

RANDOM FACES

Please note: Tile patterns are random and may not represent exactly as shown in the photo.

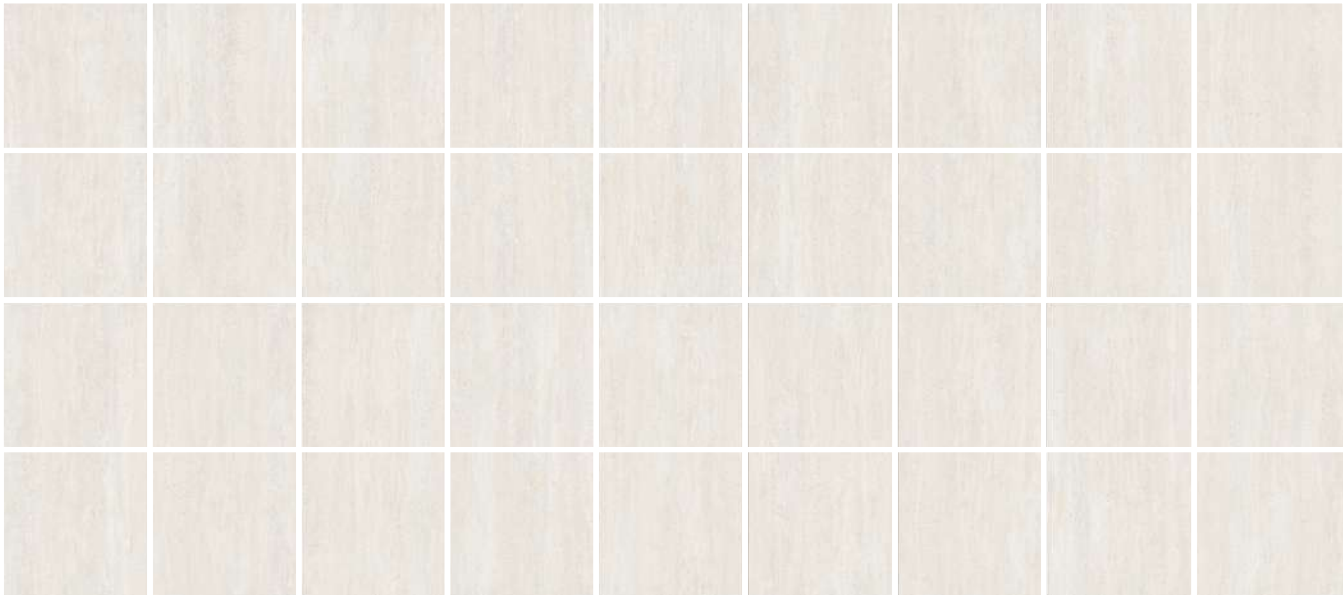

BIANCO 600x600mm

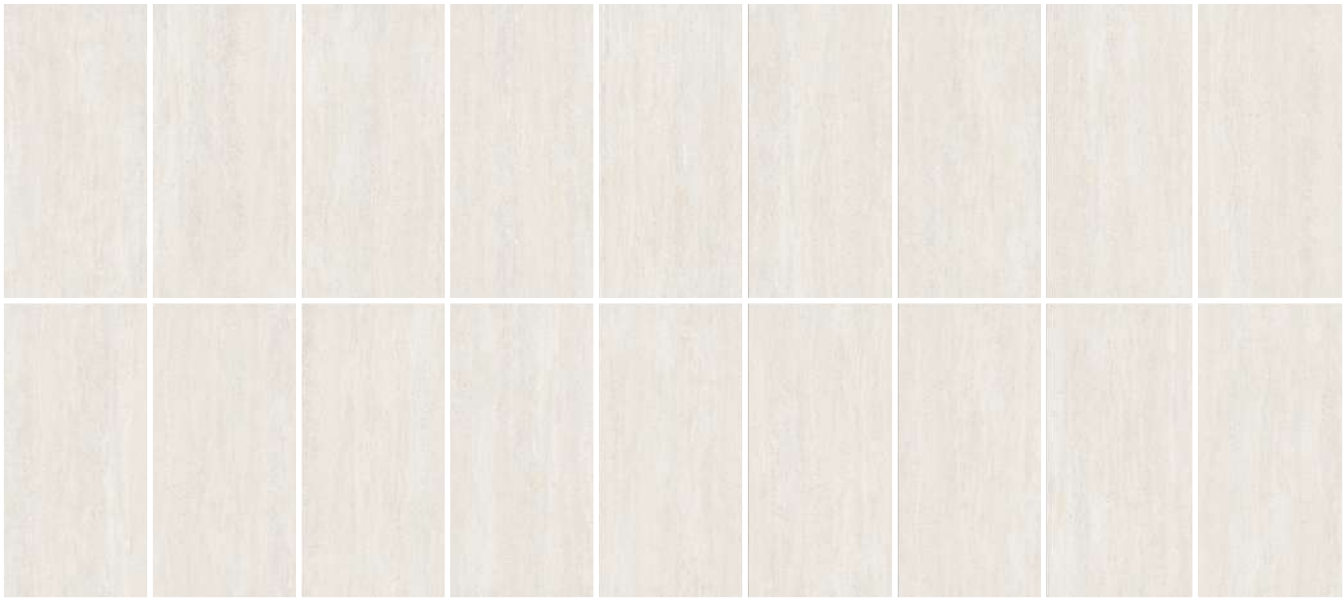

BIANCO 600x1200mm

COLOURS



BIANCO

AVAILABLE SIZES

- 300x300mm
- 300x600mm
- 600x600mm
- 600x1200mm
- 400x600x20mm

BULLNOSE ROUND EDGE

- 400x600x20mm



SABBIA

AVAILABLE SIZES

- 300x300mm
- 300x600mm
- 600x600mm
- 600x1200mm
- 400x600x20mm

BULLNOSE ROUND EDGE

- 400x600x20mm

PRODUCT FEATURE / SURFACE / APPLICATION / INSTALLATION GUIDANCE

V3 TEXTURE RATING	MIN. LAYING GAP 3mm	RECTIFIED	M MATTE	UD GRIP	WALL TILES	FLOOR TILES	02 COLOURS	02 SURFACES	05 SIZE
---	--	--	---	---	---	--	--	---	---

V1

V2

V3

✓ V4

V1=Uniform Appearance

V3=Moderate Variation

V2=Slight Variation

V4=Substantial Variation

TECHNICAL SPECIFICATION 技术标准

MEASUREMENT AND SURFACE APPEARANCE	STANDARD PRESCRIBED VALUES	MANU FACTURER'S VALUES	MANU FACTURER'S VALUES
Dimensions & Surface Quality			
Length and Width	± 0.6% max.	- 0.03-0.03%	- 0.03-0.03%
Thickness	± 5% max.	9.0-9.5mm	11.0-11.5mm
Orthogonality	± 0.5% max.	- 0.06-0.07%	- 0.06-0.07%
Straightness of sides	± 0.5% max.	- 0.06-0.07%	- 0.02-0.03%
Surfaces flatness	± 0.5% max.	- 0.05-0.07%	- 0.09-0.11%
Physical Properties			
Water absorption	≤ 0.5%	≤ 0.5%	≤ 0.5%
Breaking strength	≥ 1300N	2265N	4031N
Bending resistance	> 35N/mm	38N/mm	40N/mm²
Resistance to deep abrasion	≤ 175mm³	Class 4	Class 4
Temperature shock resistance	No visible crack	No visible crack	Durable
Resistance to frost	No visible crack	No visible crack	No visible crack
Non-slip	P3-P4	P3-P4	P3-P4
Colour resistance to light	no colour changes	no colour changes	no colour changes
Chemical Properties			
Chemical resistance	no visible changes when subjected to chemicals	Durable	Durable
Resistance to staining	> 3	Class 5	Class 5

PACKING DETAILS

SIZES	SURFACE		PCS/CTN	M ² /CTN	KG/CTN
	M	UD			
600x600x9.5mm	✓	✓	4	1.44	31.5
600x1200x10mm	✓	✓	2	1.44	32
400x600x20mm(PAVER)		✓	3	0.72	33.5
400x600x20mm(BULLNOSE)		✓	2	0.48	22.3